

IPcamSpot

Mini Dome IP camera

ZKMD4 WDR series

H.264 • WDR • 1 Megapixel • Fashionable Design • Easy Installation

Features:

- Super video quality, HD up to 720P
- WDR function
- Dual H.264 streams
- Fashionable, Compact and rugged design
- Built-in POE and WIFI(Optional)
- Quick and easy installation



Product Description

ZKTeco ZKMD4 WDR series is a fashionable mini dome IP camera with fashionable and compact design. The case is made of Zinc material to realize ruggedness function. While for installation, you can finish set-up within 60 seconds, making the installation much fast and easy.

ZKMD4 WDR series can support 1 megapixel (1280*720) resolution, delivering super H.264 compression image quality up to 25 fps. With WDR function, the camera can get good image even in dark environment. Dual video streams can be delivered simultaneously in different resolutions, frames rates and image qualities for monitoring on different platforms to meet varied requirements.

ZKMD4 WDR series also can support POE(Optional), WIFI(Optional), TF card on-board storage. The measurement is only 12.4*10.4*4.8CM. It is really an all-in-one surveillance solution that meets a wide variety of needs for indoor surveillance. You can install this cameras in applications locations like corridors, stairs, baby rooms, offices, especially small and medium places like supermarkets, shops and business halls.

ZKMD4 WDR series


www.ipcamspot.com

Technical Specifications


Product Model	ZKMD470		DNS, DDNS, NTP, UPNP,
Product Name	Megapixel Mini Dome IP camera		RTSP/RTCP/RTP, ONVIF
Camera Performance		On board storage	
Image Sensor	1/4" megapixel WDR progressive CMOS	Card slot	Supports TF Card, up to 32G
Image Resolution	1280*720	Storage	Snapshots and video clips
Minimum Illumination	0.1 Lux	Alarm and Event Management	
Lens Type	6mm fixed lens	Alarm Input	N/A
Video		Alarm Output	N/A
Video Compression	H.264 main profile level 3	Motion Detection	4 independent detection areas settable
Video Resolution	Main stream: 1280*720 Secondary stream: 640*352	RS485 port	N/A
Video Frame Rate	PAL:1~25fps;NTSC:1~30fps	Alarm Trigger	Motion detection, external input
Image settings	Brightness, contrast, saturation, low illumination, shutter, sensitivity, flip vertically/horizontally, WDR on/off	Alarm Events	Alarm via email server(send snapshot or not) ; Upload video to FTP server; save video and photo to storage card;
Audio		General	
Audio Compression	G.726/G.711	Casing	Camera: Metal (Aluminum Alloy) Color: White
Audio Input	Built-in Microphone	Power Supply	12V DC 1.5A POE: 802.3af POE standard (optional)
Audio Output	N/A	Power Consumption	8 W max
Network		Working Conditions	-10°C ~ 55°C, 10~95 % RH
Security	Multi-level users access with password protection	Weight	N.W.: 0.35 KGS G.W.: 0.55 KGS
Network Interface	10Base-T/100Base-TX Ethernet interface WIFI 802.11b/g/n wireless network (optional)		
Supported Protocol	TCP/IP, HTTP, UDP, ARP, SMTP, FTP, DHCP,		

Product dimension figure

(Remark: all the dimensions are in mm)

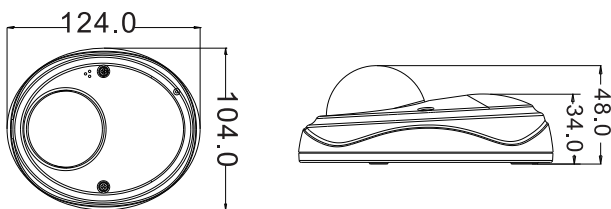

Interface figure

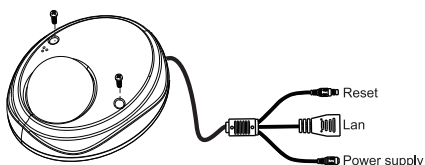

Standard accessories



ZKiVISION Software(Included in CD)



Power supply



CD